

BEJ-1804


Eco Solvent Printer (with four I3200-E1 heads)



Grando Eco Solvent Ink





Four I3200-E1 Heads



* 1.8m Four I3200-E1 Print Heads Speed

360x2400dpi - 4pass	84 m ² /h
720x1800dpi - 6pass	62 m ² /h
720x2400dpi - 8pass	47 m ² /h

Our range of wide format inkjet printers matches our knack for engineering and quality with your desire for impeccable performance and careless production. You can produce roll-to-roll indoor prints and long term outdoor signs. Wide applications in light box posters, customized car stickers, background wall cloth, label printing, advertising sign, subway advertising, shopping mall advertising signs etc.

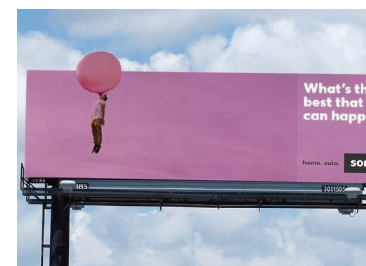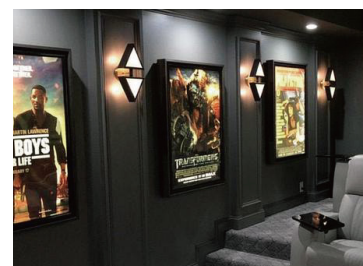


● Technical Specifications

Model	BEJ-1804		
Print Head	Four I3200-E1 Print Heads		
Printing Technology	Piezoelectric Inkjet		
Acceptable Media	Width	71.6 in.(1820 mm)	
	Thickness	Maximum 59 mil(1.5 mm)	
	Weight	132.2 lb.(60 kg)	
Printing Width	70.8 in.(1800 mm)		
Ink Cartridges	Type	Eco Solvent Ink	
	Capacity	4*4 CISS (220ml ink cartridge with 1.5L ink tank)	
	Color	4 colors (Cyan, Magenta, Yellow, Black)	
Printing Resolution	Maximum 2400 dpi		
Printing Speed	4pass(360x2400dpi) : 84 sqm/h		
	6pass(720x1800dpi) : 62 sqm/h		
	8pass(720x2400dpi) : 47 sqm/h		
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system		
Interface	USB 2.0		
Power Supply	AC 220V ± 10%, 50/60 HZ		
Dimensions(with stand)	127.2(W) x 46.1(D) x 74.1(H) in.		
	3232(W) x 1172(D) x 1884(H) mm)		
Weight(with stand)	771.6 lb. (350KG)		
Package Dimensions	Entirety : 131.8(W) x 29.9(D) x 40.9(H) in. (3350(W) x 760(D) x 1040(H) mm)		
Package Weight	992 lb. (450 kg)		
Environment	Power on	Temperature: 59°F to 90°F (15°C to 32°C) Humidity: 35 to 80% (no condensation)	
	Power off	Temperature: 41°F to 104°F (5°C to 40°C) Humidity: 20 to 80% (no condensation)	
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.		




THK high-precision mute rail



High-precision and high-stability tensioning pulley system



The automatic cleaning assembly adds a single-way valve to increase the stability of the ink supply




New pinch roller structure of three in group brings more stable feeding precision




Equipped with 4pcs authorized I3200-E1 print heads,high precision, high speed, high stability.



Bulky ink bottle with low-ink alarm represents the advanced concept of industrial application



Three stage heating system including pre-heater, print heater, and rear heater and platform vacuum system with adjustable power.



External power supply, intelligent rolling system.