


BEJ-3204S

Eco Solvent Printer (with four I3200-E1 heads)



Four I3200-E1 Heads

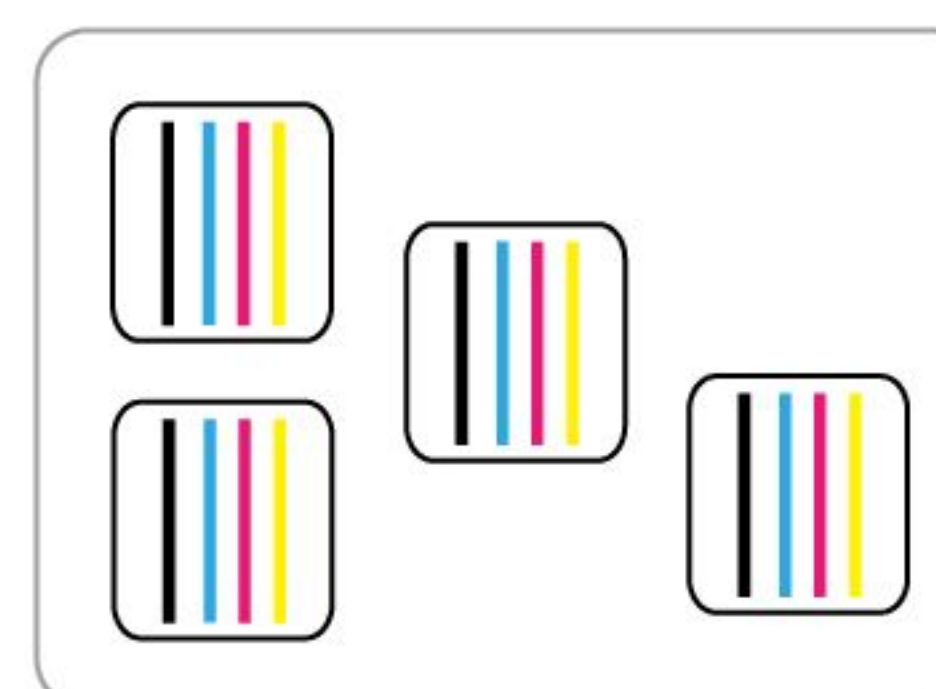

* 3.2m Four I3200-E1 Print Heads Speed

360x2400dpi - 4pass	100 m ² /h
720x1800dpi - 6pass	75 m ² /h
720x2400dpi - 8pass	50 m ² /h

Grando Eco Solvent Ink



Our range of wide format inkjet printers matches our knack for engineering and quality with your desire for impeccable performance and careless production. You can produce roll-to-roll indoor prints and long term outdoor signs. Wide applications in light box posters, customized car stickers, background wall cloth, label printing, advertising sign, subway advertising, shopping mall advertising signs etc.



• Technical Specifications

Model	BEJ-3204S
Print Head	Four I3200-E1 Print Heads
Printing Technology	Piezoelectric Inkjet
Acceptable Media	Width 126.7 in.(3220 mm)
	Thickness Maximum 39.3 mil(1 mm)
Printing Width	Weight 176 lb.(80 kg)
	125.9 in.(3200 mm)
Ink Cartridges	Type Eco Solvent Ink
	Capacity 4*4 CISS (220ml ink cartridge with 3L ink tank)
Printing Resolution	Color 4 colors (Cyan, Magenta, Yellow, Black)
	Maximum 2400 dpi
Printing Speed	4pass(360x2400dpi) : 100 sqm/h
	6pass(720x1800dpi) : 75 sqm/h
	8pass(720x2400dpi) : 50 sqm/h
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system
Interface	Network
Power Supply	AC 220V ± 10%, 50/60 HZ
Dimensions(with stand)	181.8(W)x38.1(D)x61.4(H) in.
	(4620(W)x970(D)x1560(H) mm)
Weight(with stand)	1543 lb. (700 kg)
Package Dimensions	Entirety Packing : 188.9(W)x43.3(D)x65.3(H) in. (4800(W)x1100(D)x1660(H) mm)
Package Weight	Entirety Packing : 1763.3 lb. (800 kg)
Environment	Power on Temperature: 59 ℉ to 90 ℉ [15 C to 32 C] (68 ℉ [20 C] / Humidity: 35 to 80% (no condensation)
	Power off Temperature: 41 ℉ to 104 ℉ [5 C to 40 C] / Humidity: 20 to 80% (no condensation)
Accessories	Stand, media loading and take-up system, air-cooling system, bulk ink cartridge system, etc




THK high-precision mute rail



Automatic moisturizing and cleaning components to ensure cleaning and working stability



High quality DC servo motor has good stability and long service life

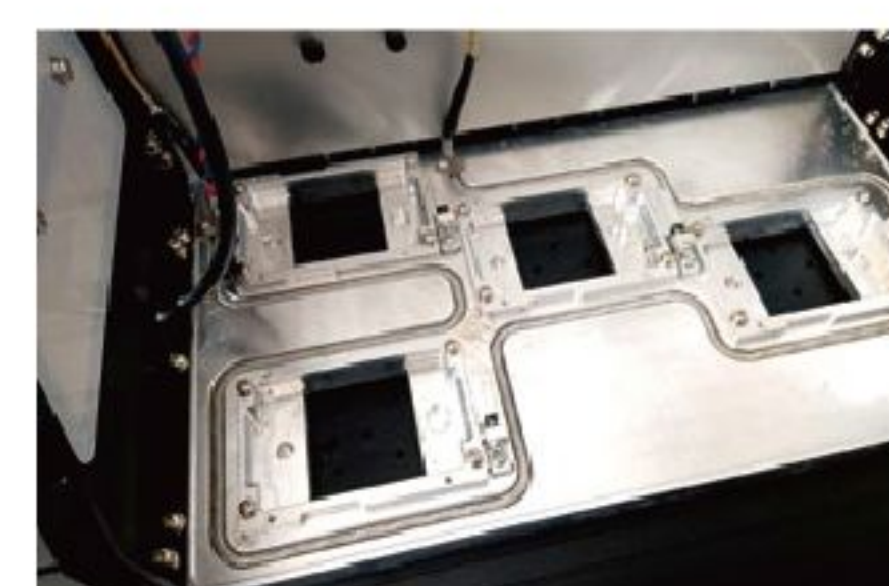

Bottom heating added to the printer carriage effectively improves printing stability



Stable 3L bulk system ensures amazing printing speed



Three-foot pinch rollers bring more stable feeding accuracy



Three stage heating system including pre-heater, print heater, and rear heater and platform vacuum system with adjustable power.



External power supply, intelligent rolling system.